

America West Drilling Supply

LXQ IR340 Shank



Hammer Specifications

Length (w/o drill bit)	39.2"
Outside Diameter	3.81"
Weight (w/o bit)	84.6 lbs.
Cylinder Bore	3.071"
Piston O.D.	3.067"
Piston Stroke	3.93"
Piston Weight	18.9 lbs.
Hole Sizes	4 1/8" - 5"
Air Pressure Consumption	100 psi - 350 psi
Wrench Size	A/F 3.149"
Connection (API Reg Pin)	Std. 2 7/8"

Features:


- Easy to service
- Special heat-treated alloy piston for long life - Rockwell 60 Hardness
- Minimal performance loss when injecting foam or water
- Drills well underwater

1350 E. Glendale Avenue
Sparks, NV 89431
(800) 800-8444 | (775) 355-1199
Fax (775) 355-8775



www.awds.com

America West Drilling Supply

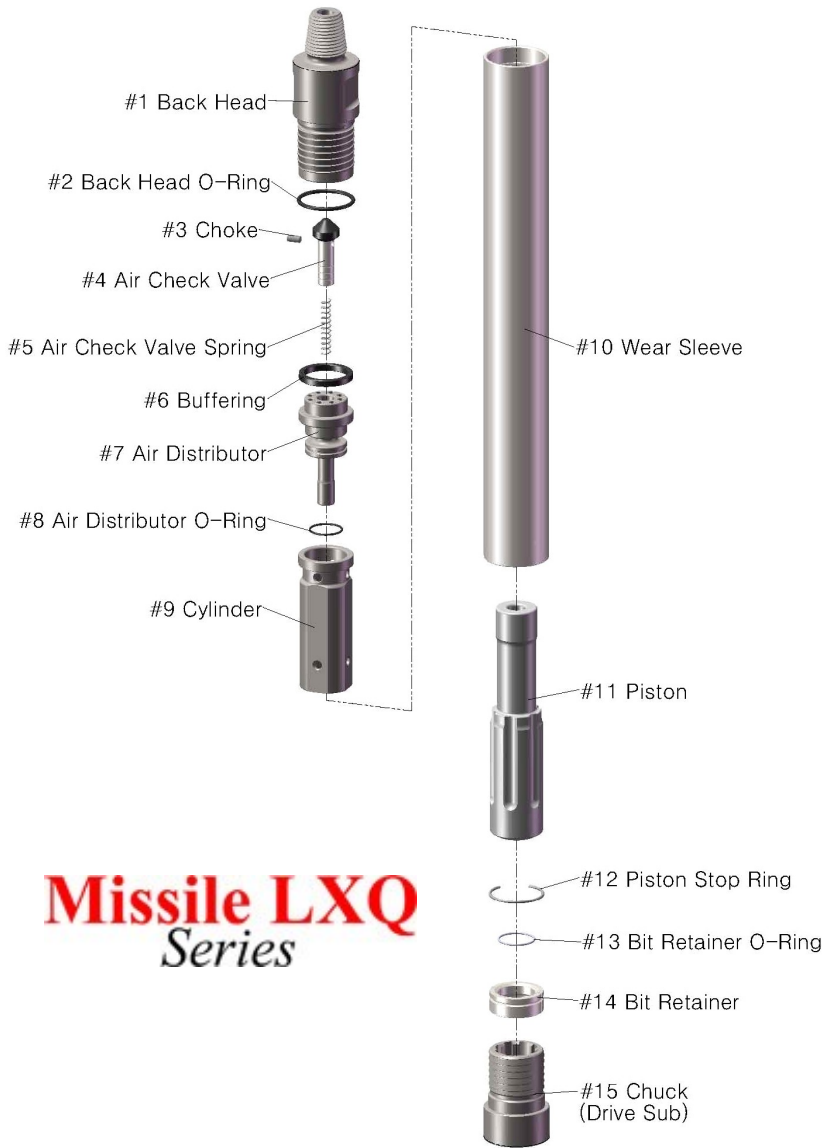

Item #	Description	Part #
1	Back Head	LQ4001
2	Back Head O-Ring	LQ4002
3	Choke	
4	Air Check Valve	LQ4004
5	Air Check Valve Spring	LQ4005
6	Make-Up Rubber (Buffering)	LQ4006
7	Air Distributor	LQ4007
8	Air Distributor O-Ring	LQ4008
9	Cylinder	LQ4009
10	Wear Sleeve	LQ4010
11	Piston	LQR4011
12	Piston Stop Ring	LQR4012
13	Bit Retaining O-Ring	LQR4013
14	Bit Retaining Ring	LQR4014
15	Chuck (Drive Sub)	LQR4015
	Choke Plug Kit	LQ4029
	O-Ring Kit	LQ4030

Missile LXQ
Series



LXQ IR340 Shank Hammer

Air Consumption Chart

PSI	150	200	250	300	350	400
CFM with blank choke	350	565	720	875	995	1,130
with 1/8" choke	375	595	760	925	1,060	1,205
with 1/4" choke	425	665	845	1,095	1,270	1,350

All hammers come fitted with a blank choke in the Air Check Valve.